

TECHNICAL SPECIFICATION SPECIALITY WALLCOVERING

Product	Rare Finds
Description	Hand made products, including metal leaf, china clay, kaolin, silk and resin.
Fire Rating	Product sold in rolls : Euroclass B Product sold in tiles : Euroclass D

PRODUCT SOLD IN ROLLS

Name	Roll size	± 10% Weight Grammes / m2	Adhesive	Composition / Backing	Pattern repeat
Beads**	100cm x 3m	2500 gms	Tekfix Plus	Glass beads with non woven backing	Random / do not reverse
Brushed Lines	92cm x 7.4m	190 gms	Tekfix 65	Metal leaf with paper backing	Random / do not reverse
Circles & Squares	94cm x 7.4m	190 gms	Tekfix 65	Metal leaf with paper backing	Leaf size 19cm / do not reverse
Eastern Cloud	92cm x 3.05m	250 gms	Tekfix 65	Metal leaf / Silk with paper backing	Random / do not reverse
Forest Bark	92cm x 7.4m	190 gms	Tekfix 65	Metal leaf with paper backing	Random / do not reverse
Leaf	105cm x 3m	300 gms	Tekfix 65	Metal leaf with non woven backing	Random / do not reverse
Mica	100cm x 3m	700 gms	Tekfix Plus	Mineral with non woven backing	Random / do not reverse
Mica Line	100cm x 3m	550 gms	Tekfix 65	Mineral with non woven backing	Random / do not reverse
Pagoda	92.4cm x 7.05m	400 gms	Tekfix 65	Metal leaf / vinyl with non woven backing	64cm V repeat / straight match / Do not reverse
Rib	105cm x 3m	550 gms	Tekfix Plus	Metal leaf with non woven backing	Random / do not reverse
Weaving Loom	92cm x 7.4m	400 gms	Tekfix 65	Metal leaf / vinyl with non woven backing	Leaf size 15.7cm / do not reverse

Product sold in rolls : installation

These products require careful surface prep and installation. Metallic finishes will highlight any imperfections so ensure the hanging surface is completely smooth.


Apply adhesive to the back of the wallcovering, and soak for 5 minutes before hanging. Do not fold or pile after pasting. Using a paper hanging brush gently smooth the wallcovering onto the wall. When using a felt roller, place a strip of material in between the roller and wallcovering to avoid damage.

Overlap and cut through. Do not reverse hang. Match up pattern / leaf size as required. Use a protective plastic strip to prevent damage to the substrate and wall surface. **Beads - splice in between rows of beads.

Avoid getting any adhesive on the surface. Immediately wipe off any excessive paste with a soft damp cloth, and then dry with a clean cloth. Do not rub or use a sponge, as it may damage the surface.

Differences in colour are a natural feature of these hand made products. Joins may be noticeable once installed.

PRODUCT SOLD IN PACKS of TILES

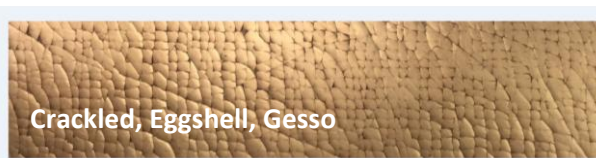

Name	Tile Size	± 10% Weight Grammes / m2	Adhesive	Composition / Backing	Pattern repeat
Bullion	Packs of mixed tiles: 9 each of 4cm x 14, 15, 59, 83, 95cm	5800 gms	Multi Bond acrylic dispersion adhesive	Resin, metal leaf with non woven backing	n/a
Crackled	Packs of 8 tiles : Each tile 22cmx94cm	4100 gms	Multi Bond acrylic dispersion adhesive	Resin with non woven backing	n/a
Eggshell	Packs of 8 tiles : Each tile 22cmx94cm	4200 gms	Multi Bond acrylic dispersion adhesive	Resin with non woven backing	n/a
Gesso	Packs of 8 tiles : Each tile 22cmx94cm	1800 gms	Multi Bond acrylic dispersion adhesive	China clay, kaolin and canvas with non woven backing	n/a

Product sold in tiles : installation

These products require careful surface prep and installation. These tiles are rigid and will not lie flat unless the hanging surface is completely smooth. The surface of the tiles is vulnerable to scratching and should be handled with care.

For cutting tiles to size, use an oscillating saw. Cut from the top side for best results. Use a template and jewellers saw for cutting into angles and difficult details.

Using Multi Bond acrylic dispersion adhesive, apply direct to the wall with a medium-notched trowel. Butt tiles next to each other. Avoid getting adhesive on the surface. Immediately wipe off any excessive paste with a soft damp cloth, and then dry with a clean cloth. Do not rub or use a sponge, as it may damage the surface. Differences in colour and texture are a natural feature of these hand made products. No grouting is needed.

Maintenance

Always carry out a trial in an inconspicuous area first to ensure cleaning agent suitable. Use clean damp cloth only. Avoid polishes, abrasive or solvent cleaners as they will damage the surface. Clean from the skirting level upwards and give a final 'rinse' with a cloth lightly dampened with clean water.

Health & Safety

This product is classified as non-hazardous and therefore does not require any special handling. This product does not require special labelling.

Handling/Storage

Store at ambient temperatures away from heat source. Suitable lifting equipment may be required.

Fire Fighting

Any extinguishing media are suitable. Wear self contained breathing apparatus, protective clothing and full face mask. Fumes should be ventilated immediately due to possible liberation of noxious gases.

Ecological

This product is not bio-degradable. Dispose of in accordance with Local Authority regulations or via an authorised contractor.